

# Servo amplifier

## mcDSA-E25XC

Article number: 1512840

 Certification: 
  
E475093


Picture similar

### Technical data

Absolute maximum rating (destruction limits)	
Power supply voltage Up no polarity reversal protection	80 V
Continuous Electronic supply voltage Ue no polarity reversal protection	33 V
Short term peak voltage < 1s Ue no polarity reversal protection	37 V
Power	
Electronic supply voltage Ue	9..30 V
Electronic current consumption@ Ue=24V*2	typ. 70 mA
Power supply voltage Up	9..60 V
Max. output current	160 A
Continuous output current (certified UL/CE)*3 @Up=24V	44 A
@Up=60V	40 A
Continuous output current (not certified)*4 @Up=24V	60 A
@Up=48V	59 A
with Heatsink (Art.No. 1511832)	70 A
PWM	
Output voltage	100% Up
PWM frequency	25, 32*5, 50 kHz
Mechanical	
Size LxWxH	111 x 100 x 39 mm
Weight	414 g
Environment	
Protection class	IP20
Ambient temperature (operation) (certified UL/CE)*6	-40..55 °C
Ambient temperature (operation) (not certified)*6	-40..70 °C
Ambient temperature (storage)	-40..85 °C
Rel. humidity (non-condensing)	5..90 %
CAN bus	
Protocol	DS301
Device profile	DS402
Max. baudrate	1 Mbit/s
CAN specification	2.0B
Galvanically isolated	yes
Functional safety	
Safety function refer safety manual	Safe Torque Off (STO)
Safety Integrity Level (SIL)	up to SIL 3
Performance Level (PL)	up to PL e

Sensor supply (Encoder/Hall)	
Output voltage	5 V
Max. output current	0.2 A
Incremental encoder	
Type	incremental
Signals	A,/A,B,/B,Inx,/Inx
Max. frequency (per channel)	500 kHz
Input voltage (24V tolerant)	0..5 V
Signal type	differential, open collector, single ended
Hall sensors	
Signals	H1,/H1,H2,/H2,H3,/H3
Max. frequency (per channel)	10 kHz
Input voltage (24V tolerant)	0..5 V
Signal type	differential, open collector, single ended
Digital inputs	
Number - digital inputs	6 (Din0..5)
Low voltage	0..5 V
High voltage	8..30 V
Notice	Din5 parallel with Dout2*7
STO channels (ST0-A..B)	
Low voltage	0..5 V
High voltage	8..30 V
Digital outputs	
Number	3 (Dout0..2)
Continuous output current (certified UL/CE)	1.5 A
Load	resistive, inductive
Output voltage	Electronic supply voltage Ue
Signal type	positive switching
Notice	Dout2 parallel with Din5
Analog inputs	
Number	2 (Ain0..1)
Signal type - Ain0	+/- 10 V, 12 Bit, differential
Signal type - Ain1	+/- 10 V, 12 Bit, single ended

\*1 The certified performance data must be observed (see UL Instruction Note and Safety Manual (CE))

\*2 power amplifier switched off, 5V output (sensor supply) is free, STO active

\*3 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (asymmetrical), ambient temperature 55 °C, I/O's and 5V output active, RMS current: 44 A → 36 Aeff, 40 A → 33 Aeff

\*4 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (asymmetrical), ambient temperature 40 °C, I/O's and 5V output free, RMS current: 60 A → 49 Aeff, 59 A → 48 Aeff, 70 A → 57 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

\*5 default value

\*6 Hex-Switches should be not used at T &lt; -25°C (setting of node ID only possible by firmware parameters)

\*7 Input voltage must not exceed Electronic supply voltage Ue

Additional technical data are available in mcManual.



miControl® GmbH


Chausseestraße 34

14979 Großbeeren (bei Berlin)

Copyright 2021 by miControl® - Modifications and errors excepted  
mcDSA-E25XC - PV1.08.00.00 / DV1.00.00.04

Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

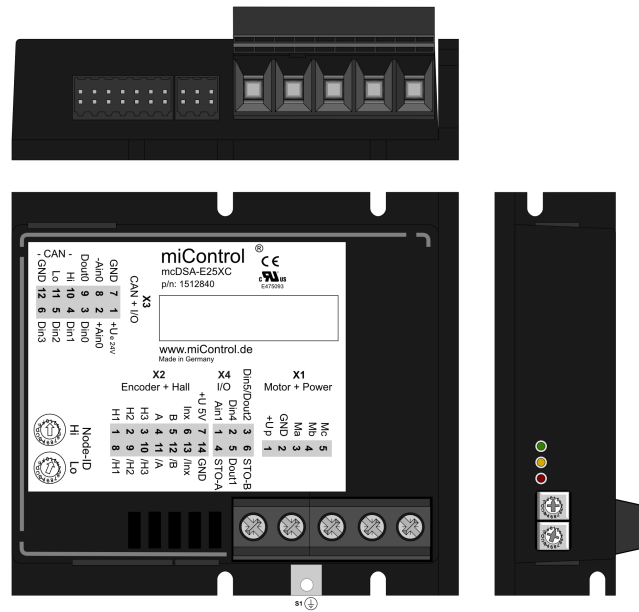

©2021 by miControl

Terminal assignment

X1 Motor		
1	+Up	Power supply voltage
2	GND	Ground for power supply voltage
3	Ma	Motor phase A
4	Mb	Motor phase B
5	Mc	Motor phase C
X2 Hall and inc. encoder		
1	H1	Hall sensor 1
2	H2	Hall sensor 2
3	H3	Hall sensor 3
4	A	Inc. encoder, A channel
5	B	Inc. encoder, B channel
6	Inx	Inc. encoder, index channel
7	+U5V	5V output voltage for sensor supply Sensors: encoder, hall
8	/H1	Hall sensor 1 inverted
9	/H2	Hall sensor 2 inverted
10	/H3	Hall sensor 3 inverted
11	/A	Inc. encoder, A channel inverted
12	/B	Inc. encoder, B channel inverted
13	/Inx	Inc. encoder, index channel inverted
14	GND	Ground for sensor supply Notice: don't connect with system GND
X3 I/O's and CAN		
1	+Ue24V	Electronic supply voltage
2	+Ain0	Analog input 0, plus
3	Din0	Digital input 0
4	Din1	Digital input 1
5	Din2	Digital input 2
6	Din3	Digital input 3
7	GND	Ground for electronic supply voltage
8	-Ain0	Analog input 0, minus
9	Dout0	Digital output 0
10	CAN Hi	CAN High
11	CAN Lo	CAN Low
12	CAN GND	CAN Ground

X4 I/O's		
1	Ain1	Analog input 1
2	Din4	Digital input 4
3	Din5/Dout2	Digital input 5 / Digital output 2
4	STO-A	STO channel A
5	Dout1	Digital output 1
6	STO-B	STO channel B
S1 Screw (M4)		
-	FE	Functional earth